




**Waukesha
Cherry-Burrell**


® An SPX Process Equipment Operation

SPX Process Equipment

- **316L Stainless Steel**
- **Rugged, Machined-from-bar stock body**
- **Compact, Full-Flow design with sealed, liquid-tight closure**


W45 Check Valve

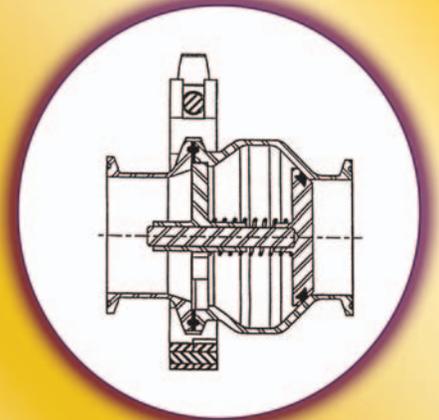

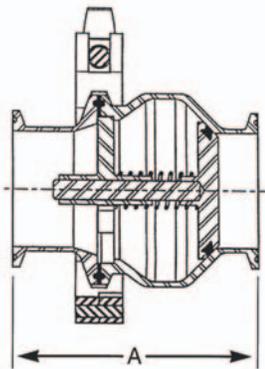

Fixed compression closure option for high velocities.

Size	A
1"	4"
1 1/2"	4"
2"	4"
2 1/2"	5"
3"	5 1/2"
4"	6"

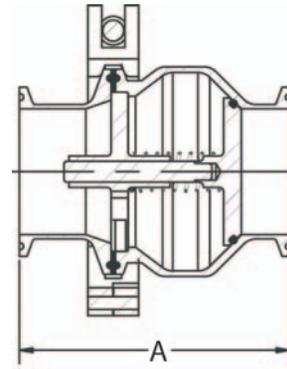

O-ring seat with light spring (1.4 psi opening force) for low flow resistance.

316L stainless steel construction

Machined from solid bar stock and all surfaces machined at 32Ra or better.

Electro-polished spring

Eliminates premature failure from surface stress in the spring; easier to clean, longer life.

Limited stroke to prevent over-compression:

- *Improves Spring Life*
- *Reduces Stem Wear*
- *Improves Cleanability*

For more information about our worldwide locations, approvals and certifications, and local representatives, please visit our web site.

Web Site: www.spxpe.com

E-Mail: wcb@processequipment.spx.com

SPX Process Equipment

Your local contact

611 Sugar Creek Road Delavan, WI 53115 Telephone: (262)728-1900 or (800)252-5200 Fax: (262)728-4904 or (800)252-5012

SPX Process Equipment reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Certified drawings are available upon request.

Issued: 09/06 FH-1836